

# WILDCAT™

**X LIMITED**



**NEW FOR 2014** THE WILDCAT X LIMITED gets ITP Blackwater Evolution tires and aluminum beadlock wheels. This Wildcat™ also includes aluminum door panels, a full-molded roof and race-proven Elka Stage 5 shocks.






# 2014

## WILDCAT X LIMITED

|  |  |
|--|--|
| Engine Displacement (cc)                 | 951  |
| Engine Type                              | V-Twin, SOHC, 4-Stroke, 4-Valve w/EFI HO           |
| Cooling System                           | Liquid with Twin Fan                               |
| Bore & Stroke (mm)                       | 92x71.6  |
| Alternator Capacity (amps)               | 36   |
| Speedometer                              | Analog/Digital                                     |
| Odometer                                 | Digital  |
| Fuel Capacity (gal./liters)              | 8.8/33.3   |
| Transmission                             | Rapid Response Clutch, Hi/Lo Range, Reverse & Park |
| Drive System                             | 2/4 WD + Electric Front Differential Lock          |
| Front Brakes                             | Hydraulic Disc with Dual Piston Caliper            |
| Rear Brakes                              | Hydraulic Disc                                     |
| Front Suspension                         | Double A-Arm                                       |
| Front Travel (in./cm)                    | 17/43.2  |
| Rear Suspension                          | 5-Link Trailing Arm                                |
| Rear Travel (in./cm)                     | 18/45.7  |
| Front Tires                              | 27x9R14  |
| Rear Tires                               | 27x11R14   |
| Overall Length (in./cm)                  | 128/325.1  |
| Overall Width (in./cm)                   | 64/162.6   |
| Overall Height (in./cm)                  | 66.8/169.7   |
| Wheelbase (in./cm)                       | 95/241.3   |
| Ground Clearance (in./cm)                | 13/33  |
| Dry Weight (lbs./kg)                     | 1380/626   |
| Front Rack Capacity (lbs./kg)            | NA   |
| Rear Rack/Box Storage Capacity (lbs./kg) | 300/136.1  |
| Towing Capacity (lbs./kg)                | NA   |
| Minimum Operator Age                     | 16 with Valid Driver's License                     |
| Available Colors                         | Matte Black Paint, Vibrant Red Metallic Paint      |

## Special Features

2 Race-Inspired Color-Matched Bucket Seats, Power Steering, Aluminum Beadlock Wheels, Automotive-Style Paint, Full Aluminum Doors, Tilt Steering, Elka Stage 5 Shocks with Dual Speed Compression Adjustment & Rebound Adjustment, Preload Adjustable & Dual Rate Springs, Dual LED Headlights & Taillights, Full-Molded Roof, Tie-Down Hooks, Glove Box, Underseat Storage, ITP Blackwater Evolution Tires, Front & Rear Aluminum Bumpers, X Engine Package, Rapid Response CVT System

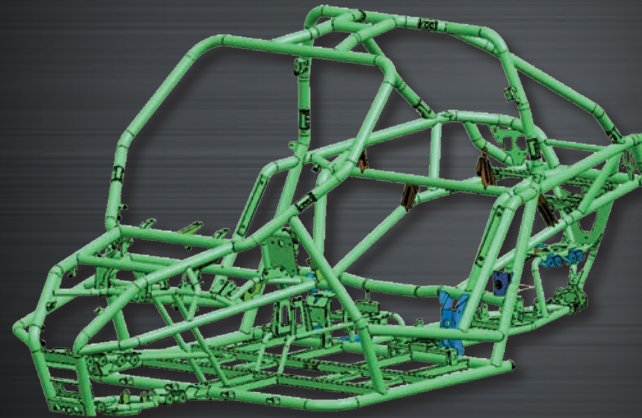

## EXOSKELETON CHASSIS

Inspired by the exoskeleton design of sand rails, the Wildcat's chassis is built from high-strength low-alloy steel, sporting a first-class full-perimeter design. The full-perimeter frame is an industry first on a production vehicle. With a low center of gravity and a 40/60 weight distribution, the front end remains light and nimble as it scrambles up the roughest terrain. In the same conditions the competitions' machines are notorious for hopping around. The Wildcat holds its ground like no other ROV.



## 1000 H.O. ENGINE

The 951cc, H2, liquid-cooled V-twin EFI engine is a torque monster. The race-tuned motor on X models ups your output to 90+ horsepower.

The Wildcat power plant features a Pentroof Hemispherical Combustion Chamber. The design features 4 valves per cylinder, the key to creating more efficient combustion. There's also a 2-into-1 tuned ceramic-coated exhaust and an air-intake system with 50mm throttle body.

## TEAM DRIVE CLUTCH

for quick-response acceleration.

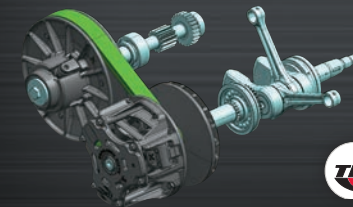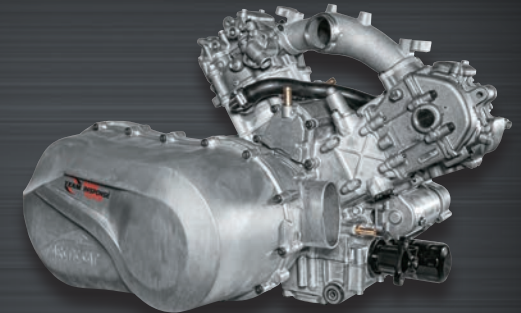

ROVs can be hazardous to operate. For your safety, all occupants must wear a seat belt, approved helmet, eye protection and protective clothing; use handhold and stay inside vehicle. Never ride on paved surfaces or public roads. Never engage in stunt driving; riding and alcohol/drugs don't mix and could cause serious injury or even death. Avoid excessive speeds and be particularly careful on difficult terrain. We recommend all ROV operators have a valid driver's license. No operators under age 16. Never carry a passenger in the cargo box; occupants must be able to place both feet on the floor while keeping their back against the back of the seat. Arctic Cat recommends that all riders read and understand their operator's manual before operation. Along with concerned conservationists everywhere, Arctic Cat urges you to "Tread Lightly" on public and private lands. Ride only on designated areas or trails. Preserve your future riding opportunities by showing respect for the environment, local laws and the rights of others when riding. Do not shoot from or lean fi rearms or bows against the ROV. All materials and specifications are subject to change without notice. All specifications, competitive specifications, claims and information contained within are based on current knowledge and readily available printed material as of November 1, 2013. Elka® is a registered trademark of Elka Suspension Inc. TEAM® Rapid Response™ is a registered trademark of TEAM Industries. Arctic Cat®, Share Our Passion,™ and Wildcat™ are trademarks or registered trademarks of Arctic Cat Inc. ©2013 Arctic Cat Sales Inc., Thief River Falls, MN 56701. Arctic Cat ROVs are world-class products from Arctic Cat Inc.